

MICROSTRIP PATCH ANTENNA FOR WIDEBAND WIRELESS WEARABLE SYSTEMS

Alejandro Iturri-Hinojosa, Cirilo G. León-Vega and Mohamed Badaoui

Escuela Superior de Ingeniería Mecánica y Eléctrica del Instituto Politécnico Nacional, Ciudad de México, México

ABSTRACT

A microstrip patch antenna for 5.6 GHz wireless wearable systems is presented. Cotton substrate with 3 mm of high and 1.5 of relative permittivity has been considered for the patch antenna. The available band reached by the patch antenna is 1.12 GHz, from 5.24 GHz to 6.36 GHz. The antenna has an omnidirectional radiation pattern.

Keywords: Patch antenna, wearable systems, wireless systems.

INTRODUCTION

Many wireless standards operate on the 5.6 GHz frequency band. One is IEEE 802.11a Wireless Local Area Network (WLAN) with band frequencies 5.15-5.35 GHz and 5.725-5.825 GHz. Also, WiMAX (Worldwide Interoperability for Microwave Access) standards is the sixth new standard, so called IMT-2000 OFDMA TDD WMAN, to be admitted to the family of IMT-2000 radio interface specifications, is intended to obtain the same worldwide distribution for Internet as that reached or current mobile-phone communications (Prasad 2010, Brégains 2010). Some WiMAX applications uses 5.6 GHz central frequency band, like Unlicensed National Information Structure (U-NII) with two band frequencies 5.15-5.35 GHz and 5.725-5.825 GHz, HiperLAN outdoor and indoor operations with band frequencies 5.15-5.35 and 5.470-5.725, respectively.

WLAN networks have a smaller service area than WiMAX networks. Currently, WiMAX technology is expected to provide high-capacity service in the Internet connection, even greater than currently achieved by mobile phone communication. Today, the scientific, technical and industrial community offers proposals in the research and manufacture of WiMAX devices for indoor and outdoor communication with wireless broadband service. For example, (Brégains 2010) proposes its antenna design for WiMAX terminals conformed by electronically coupled patches, achieving notable gain values and wide bandwidths.

WIRELESS WEARABLE SYSTEMS

Wireless Body Area Networks (WBAN)

Systems with portable antennas are considered part of the Wireless Body Area Networks (WBAN), and have several fields of applications, such as search, tracking, navigation, medical services, military, rescues, national defense, portable computing, sports, entertainment, etc. The frequencies assigned for the WBAN systems are 400 MHz for the

Microstrip Patch Antenna for Wideband Wireless Wearable Systems

Communication System in Medical Implants, 2.4 GHz and 5.8 GHz for Industrial, Scientific and Medical (ISM) applications and from 3 GHz to 10 GHz for the Ultra Wide Band services (UWB). The main requirements of WBAN systems are: compact transceivers, minimum power consumption, optimization for use in people, miniaturization, omnidirectional radiation pattern, tuning to counteract effects introduced by the human body (Movassaghi 2014, Chen 2011, Lim 2014).

Wearable patch antennas

Portable microstrip antennas in garments are widely used in wireless applications. Current mobile devices, such as laptops and smart cell phones, can use external patch antennas installed in garments, and improve their connectivity to the Internet through technologies such as WLAN and WMAN networks. This type of patch antennas are intended for military, medical and sports applications. There are interesting proposals for microstrip antennas for garments, designed to meet stability in frequency of operation and bandwidth, compaction, light weight and good performance in gain and loss of return.

A rectangular patch antenna with an "L" aperture with good performance for the frequency bands of 2.4 GHz, from 2.25 GHz to 2.74 GHz, and 5.6 GHz, from 4.3 GHz to 6.8 GHz, have been proposed by (Mersani 2016). These designs were developed to operate in WLAN and WiMAX frequency bands. The substrates used in its design are polyester and cotton jeans in two different types of materials, conductive textiles (Electro-textiles) that are Pure Copper Polyester Taffeta and Zelt Fabrics. The directivity responses using cotton jeans with pure copper as substrate in the patch antenna reach 2.67 dBi and 3.68 dBi, for the frequencies 2.4 GHz and 5.8 GHz, respectively. A dual-band patch antenna is proposed by (Afridi 2013) for the 2.4 GHz and 5.2 GHz frequency bands, with maximum gains of 2.0 dBi and 1.74 dBi, respectively.

The proposed wearable patch antenna of this article operates at the frequency of 5.6 GHz.

MICROSTRIP PATCH ANTENNA

The patch antenna designed for the 5.6 GHz frequency is shown in figure 1. Four slots were made on the sides of the rectangular patch in order to reach the resonant frequency. The cotton substrate parameters are: 1.5 of relative permittivity, 3 mm of high and 0.025 of dielectric loss tangent. The feeding location is 1.8 mm in the direction of the semiaxis "-X", in the line "y" equal to zero. The connector type of the feeder port must be SMA coaxial, with internal conductor diameter equal to 1.4 mm and external conductor diameter equal to 3.4 mm.

Microstrip Patch Antenna for Wideband Wireless Wearable Systems

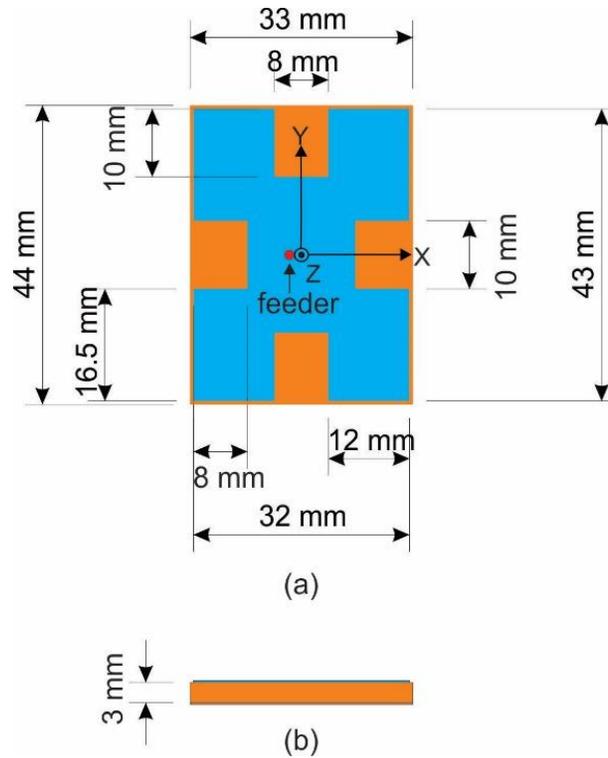


Figure I. Microstrip patch geometry (a) top and (b) side view

Figure 2 shows the estimated return loss for the patch. The resonant frequency is at 5.56 GHz.


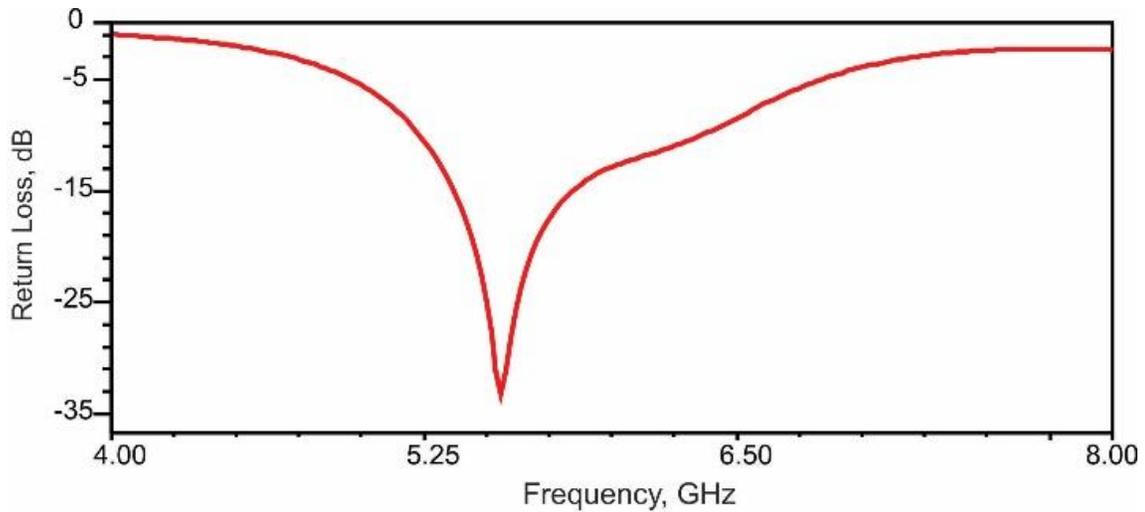


Figure II. Return loss of the path antenna with cotton substrate

Microstrip Patch Antenna for Wideband Wireless Wearable Systems

The E and H -Plane electromagnetic radiation fields are presented in figure 3.

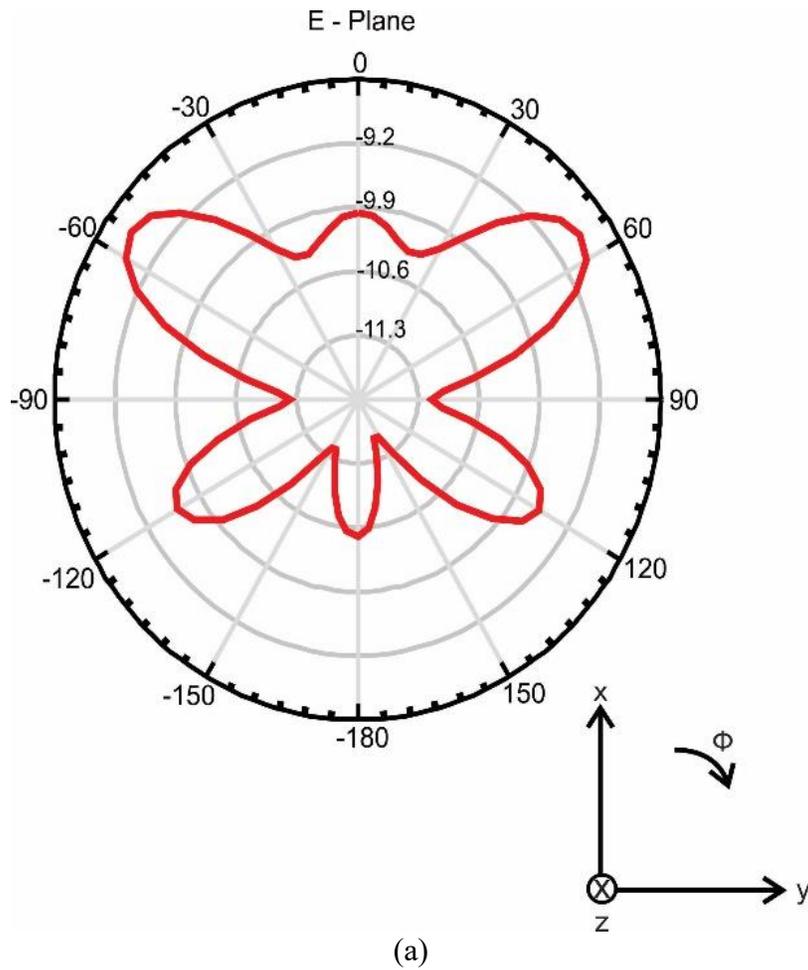

Microstrip Patch Antenna for Wideband Wireless Wearable Systems

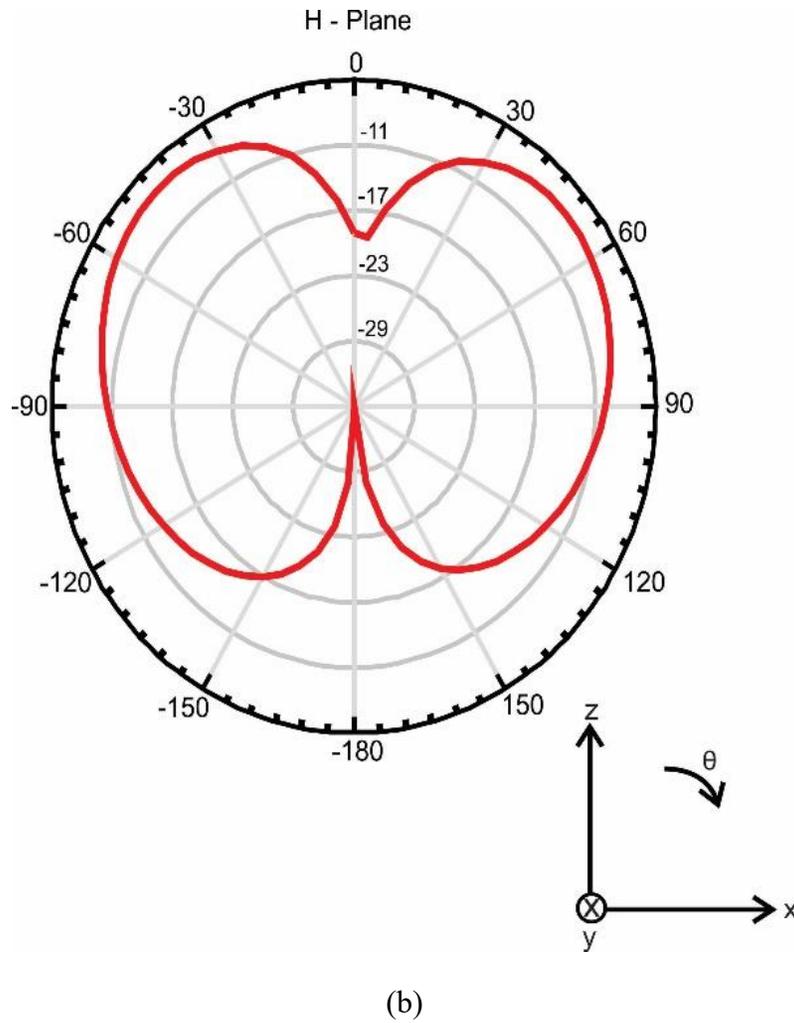


Figure III. (a) E and (b) H -Plane radiation

Figure 3 shows the radiation pattern in 3D.

Microstrip Patch Antenna for Wideband Wireless Wearable Systems

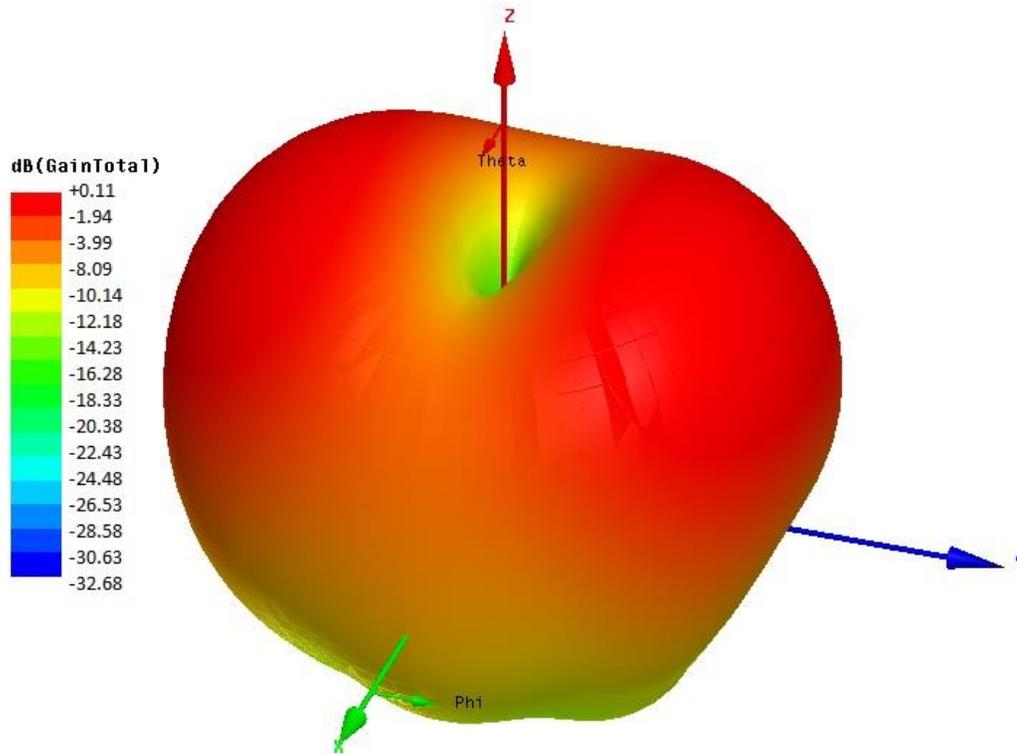


Figure IV. 3D radiation pattern

CONCLUSIONS

A wideband wearable patch antenna for 5.6 GHz Wireless applications has been designed. The substrate material considered for the patch antenna is cotton. The bandwidth provided by the patch antenna for the modulated carrier signals of 5.6 GHz, like WiMax technology, is 1.12 GHz. The E and H-plane radiations are presented. The antenna has omnidirectional radiation pattern in H-plane having its radiation pattern very similar to an electric monopole. The simulated maximum gain reaches 0.1 dB.

ACKNOWLEDGEMENT

The authors are grateful to the SIP project 20181081 of the Polytechnic Institute for the support provided.

Microstrip Patch Antenna for Wideband Wireless Wearable Systems

REFERENCES

- Prasad, Ramjee; Velez, Fernando J. WiMAX networks: techno-economic vision and challenges. *Springer Science & Business Media*, 2010.
- Brégains, J. C., Castedo, L., & Ares-Pena, F. (2010). A WiMAX Conformal Broad-Beam Antenna [Antenna Designer's Notebook]. *IEEE Antennas and Propagation Magazine*, 52(6), 106-109.
- Movassaghi, S., Abolhasan, M., Lipman, J., Smith, D., & Jamalipour, A. (2014). Wireless body area networks: A survey. *IEEE Communications Surveys & Tutorials*, 16(3), 1658-1686.
- Chen, M., Gonzalez, S., Vasilakos, A., Cao, H., & Leung, V. C. (2011). *Body area networks: A survey. Mobile networks and applications*, 16(2), 171-193.
- Lim, Eng Gee, et al. Wearable Textile Substrate Patch Antennas. *Engineering Letters*, 2014, vol. 22, no 2.
- Mersani, A., & Osman, L. (2016, September). Design of dual-band textile antenna for 2.45/5.8-GHz wireless applications. *In Multimedia Computing and Systems (ICMCS), 2016 5th International Conference on* (pp. 397-399). IEEE.
- Afridi, A., Ullah, S., Khan, S., Ahmed, A., Khalil, A. H., & Tarar, M. A. (2013). Design of dual band wearable antenna using metamaterials. *Journal of Microwave Power and Electromagnetic Energy*, 47(2), 126-137.